

## ECPLC0521PS


Ultra-low Capacitance Bidirectional Micro Packaged TVS Diodes for ESD Protection

The ECPLC0521PS is designed with ECORE process TVS technology to protect voltage sensitive components from ESD. Excellent clamping capability, low leakage, and fast response time provide best in class protection on designs that are exposed to ESD. Because of its small size, it is suited for use in cellular phones, MP3 players, digital cameras and many other portable applications where board space comes at a premium. Also because of its low capacitance, it is suited for use in high frequency designs such as USB 2.0 high speed, USB 3.0 super speed, USB 3.1 super speed ,VGA, DVI, HDMI, eSATA and other high speed line applications.


It has been specifically designed to protect sensitive components which are connected to data and transmission lines from overvoltage caused by ESD(electrostatic discharge), and EFT (electrical fast transients).

### Features

- Peak Power Dissipation – 80 W (8 x 20 us Waveform)
- Stand-off Voltage: 5.0 V
- Low capacitance (<0.4pF) for high-speed interfaces
- No insertion loss to 6.0GHz
- Protects I/O Port
- Low Clamping Voltage
- Low Leakage
- Low Capacitance
- Meets MSL 1 Requirements
- ROHS compliant
- **Solid-state Punch-Through TVS Process technology**



**DFN0603-2L**



### Main applications

- High Speed Line :USB1.0/2.0/3.0/3.1,VGA,DVI,SDI,
- High Definition Multi-Media Interface (HDMI1.3/1.4/2.0)
- Serial and Parallel Ports
- Notebooks, Desktops, Servers
- Projection TV
- Cellular handsets and accessories
- Portable instrumentation
- Peripherals

### Protection solution to meet

- IEC61000-4-2 (ESD) ±15kV (air), ±8kV (contact)

### Ordering Information

Device	Qty per Reel	Reel Size
ECPLC0521PS	15,000pcs	7 Inch

### Maximum ratings (Tamb=25°C Unless Otherwise Specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (tp=8/20µs waveform)	P <sub>PPP</sub>	80	Watts
ESD Rating per IEC61000-4-2:	Contact	8	KV
	Air	15	
Lead Soldering Temperature	T <sub>L</sub>	260 (10 sec.)	°C
Operating Temperature Range	T <sub>J</sub>	-55 ~ 150	°C
Storage Temperature Range	T <sub>STG</sub>	-55 ~ 150	°C
Lead Solder Temperature – Maximum (10 Second Duration)	T <sub>L</sub>	260	°C

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

\*Other voltages may be available upon request.


1. Non-repetitive current pulse, per Figure 1.

### Electrical characteristics (Tamb=25°C Unless Otherwise Specified)


Device	V <sub>RWM</sub> (V)	I <sub>R</sub> @ V <sub>RWM</sub> (uA)		V <sub>BR</sub> @ 1 mA (Volts)	R <sub>dyn</sub> Ω	V <sub>C</sub> @ 2 A (V)	Capacitance @ V <sub>R</sub> = 0 V, 1 MHz (pF)	
		Typ.	Max	Min	Typ.	Typ	Max	
		ECPLC0521PS	5.0	0.01	0.1	6.0	1.4	15.0

Junction capacitance is measured in VR=0V, F=1MHz


Symbol	Parameter
V <sub>RWM</sub>	Working Peak Reverse Voltage
V <sub>BR</sub>	Breakdown Voltage @ I <sub>T</sub>
V <sub>C</sub>	Clamping Voltage @ I <sub>PP</sub>
I <sub>T</sub>	Test Current
I <sub>RM</sub>	Leakage current at V <sub>RWM</sub>
I <sub>PP</sub>	Peak pulse current
C <sub>O</sub>	Off-state Capacitance
C <sub>J</sub>	Junction Capacitance

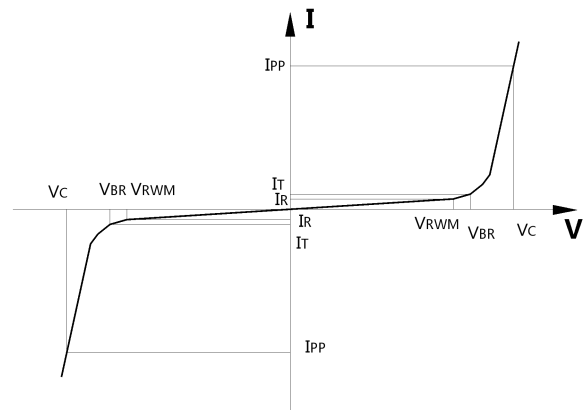


**Typical electrical characterist applications**

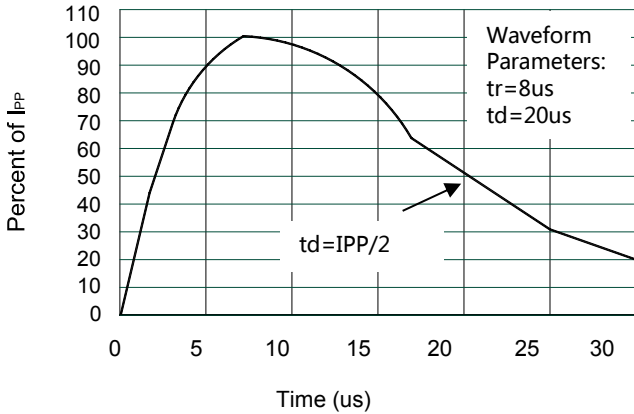


**Pulse Waveform**

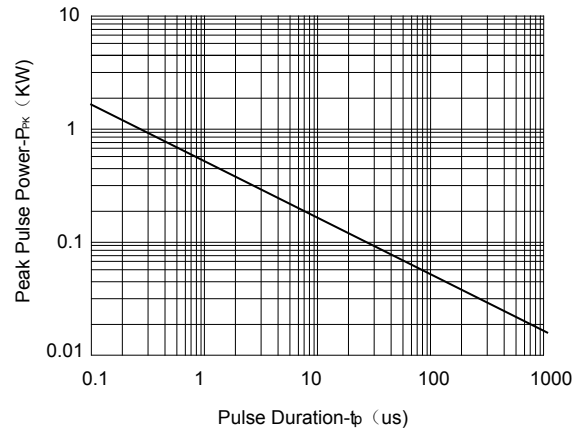

**Non-Repetitive Peak Pulse Power vs. Pulse Time**

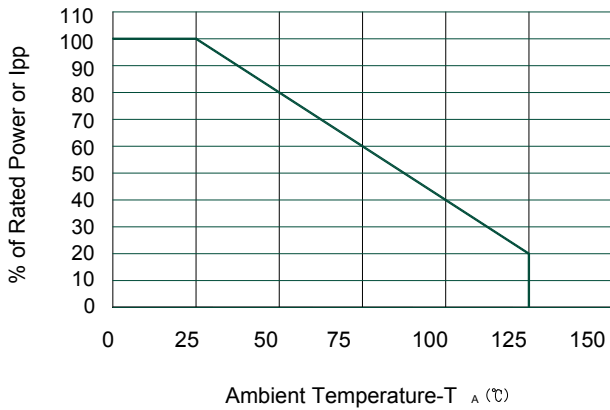


**Power Derating Curve**

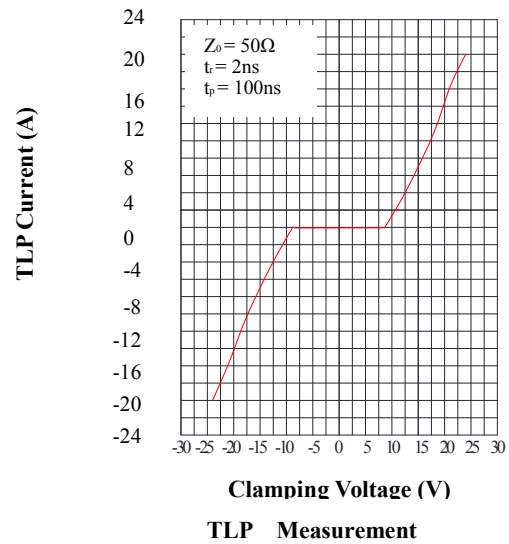


## Package Information

### DFN0603-2L

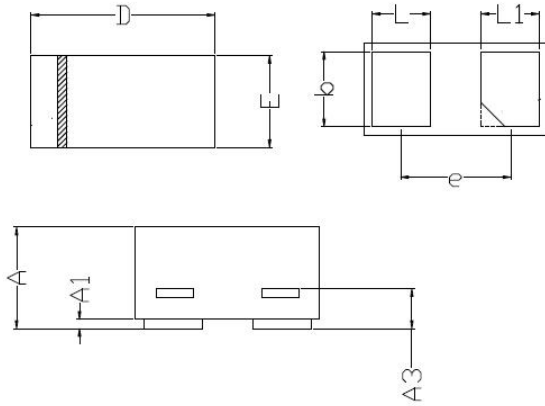


DIM	Millimeters		Inches	
	Min	Max	Min	Max
A	0.230	0.330	0.009	0.013
A1	0.000	0.050	0.000	0.002
A3	0.102REF		0.004REF	
D	0.550	0.650	0.021	0.026
E	0.250	0.350	0.010	0.014
b	0.215	0.275	0.008	0.011
L	0.115	0.175	0.005	0.007
L1	0.115	0.175	0.005	0.007
e	0.40BSC		0.016REF	

## Recommended Pad outline

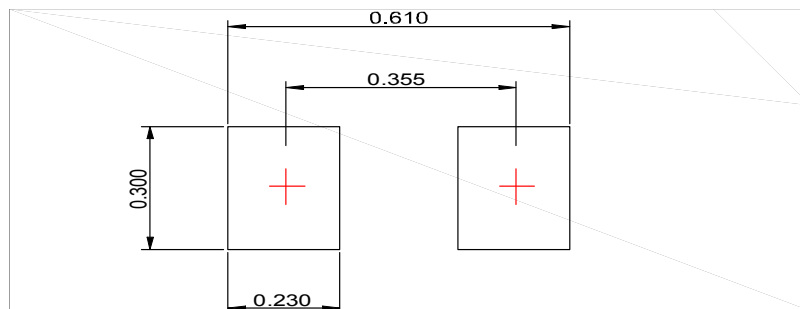

## DFN0603-2L Reel Dim

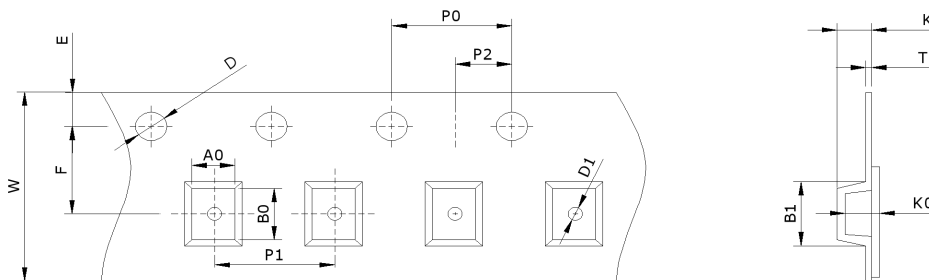

Package	Chip Size (mm)	Pocket Size B0×A0×K0(mm)	Tape Width	Reel Diameter	Quantity Per Reel	P0	P1
DFN0603-2L	0.6×0.3×0.33	0.68×0.38×0.36	8mm	178mm(7")	15000 pcs	4mm	2mm
D0	D1	E	F	K	T	W	
1.5mm	0.2mm	1.75mm	3.5mm	0.38mm	0.2mm	8mm	