

P-Channel 30V (D-S) MOSFET

PRODUCT SUMMARY		
V _{DS} (V)	R _{DS(on)} (Ω)	I _D (A) ^a
- 30	0.0098 at V _{GS} = 10 V	- 19.7
	0.0165 at V _{GS} = 4.5 V	- 15.2

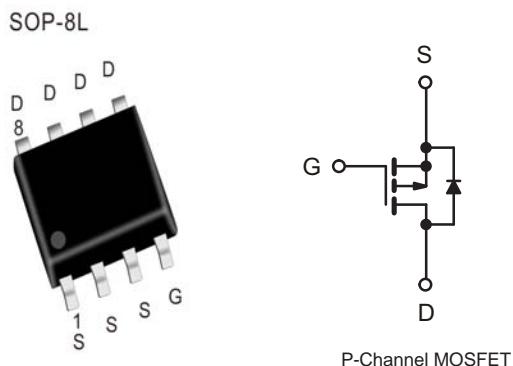
Features

- Low Gate Charge
- RoHS Compliant

Applications

- Load Switches
 - Notebook PCs
 - Desktop PCs

Pin Configuration



Packing Information

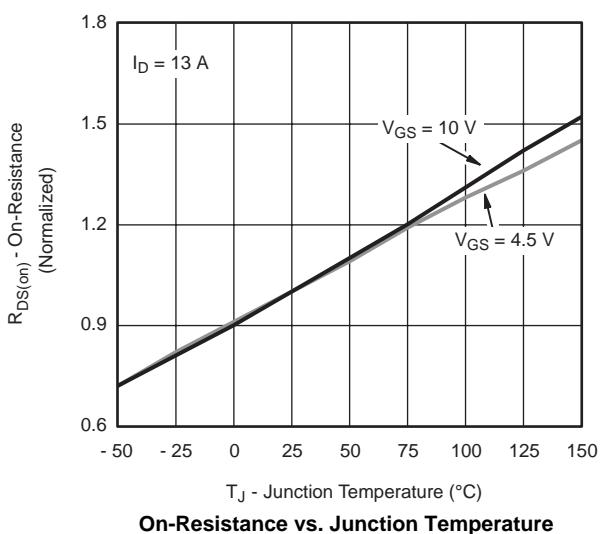
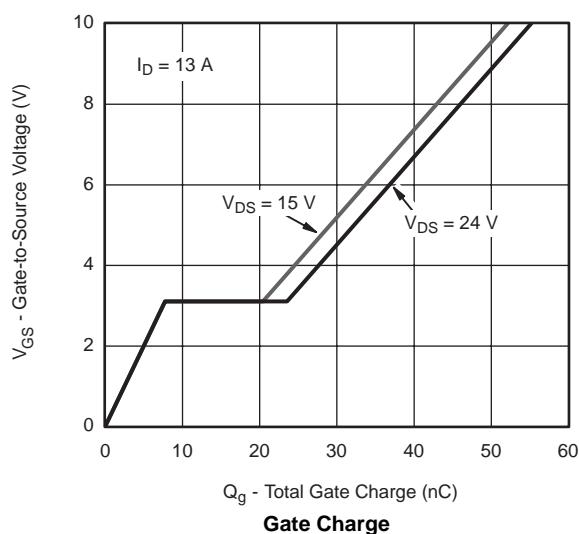
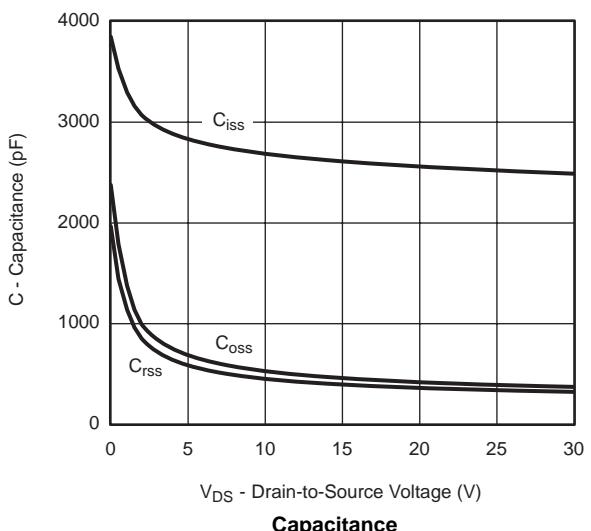
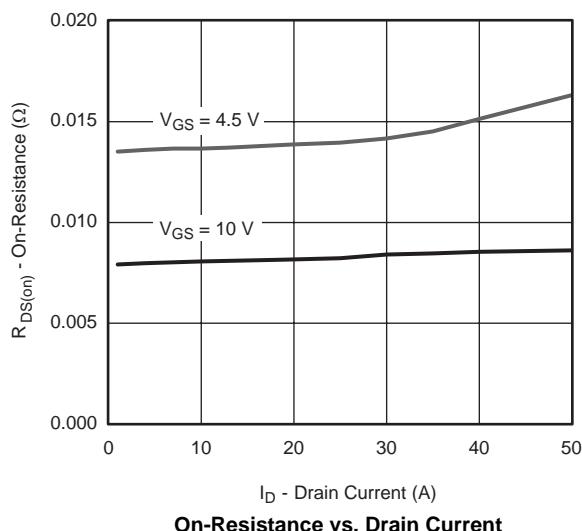
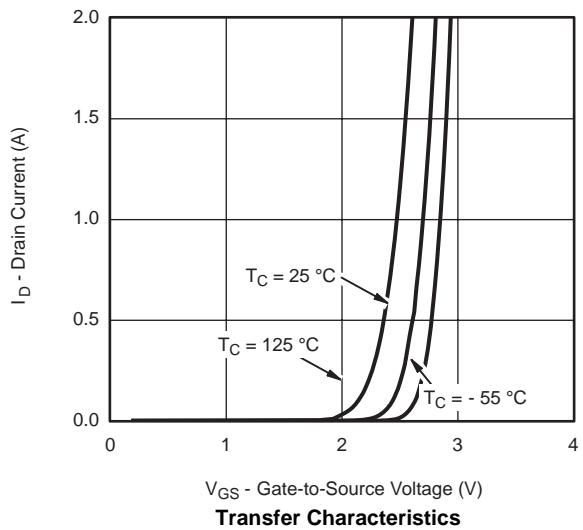
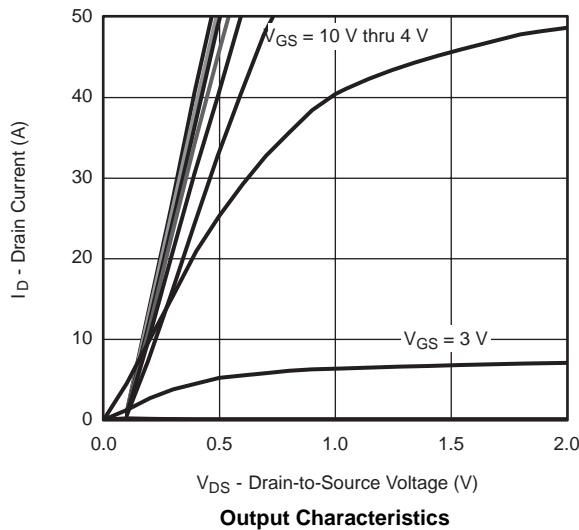
Device	Marking	Reel Size	Tape Width	Quantity
EC4425	13D XXX	12"	13mm	3000pcs

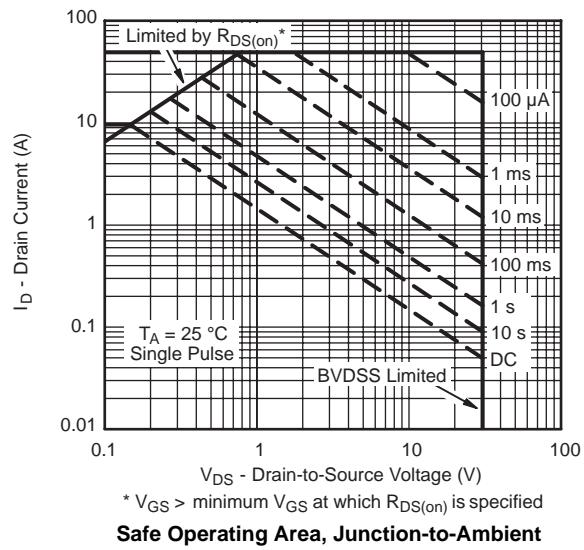
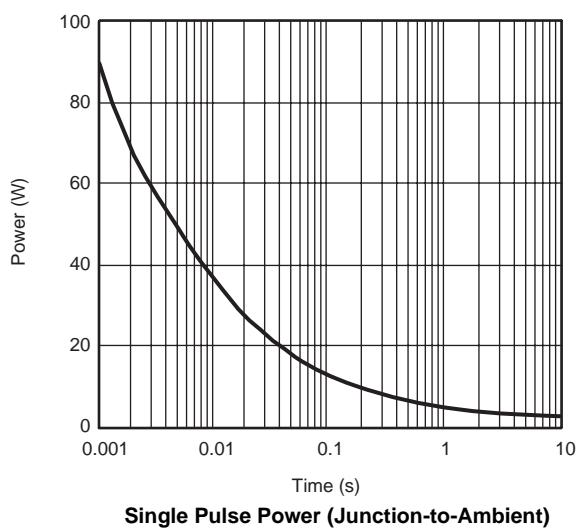
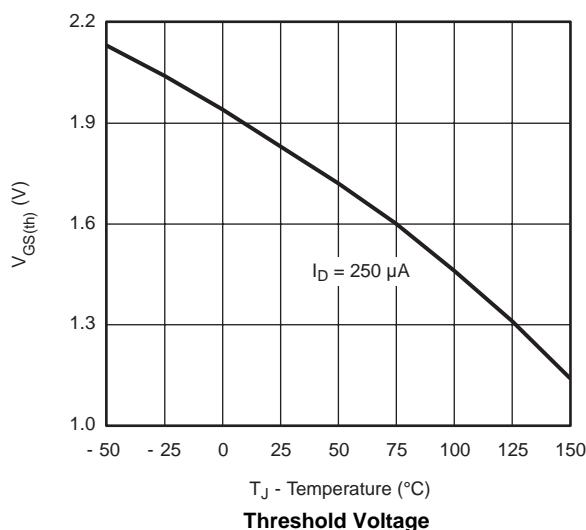
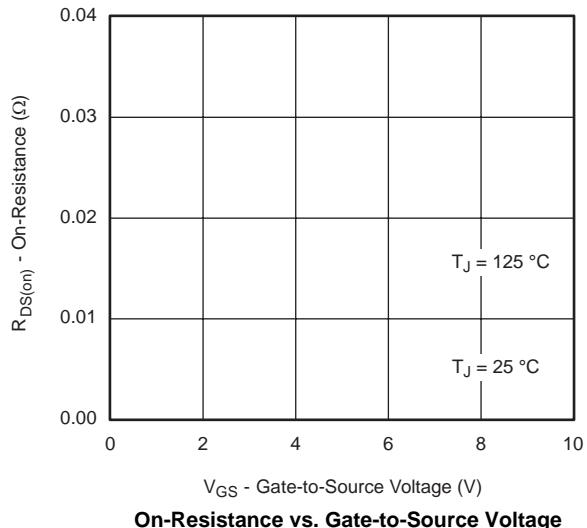
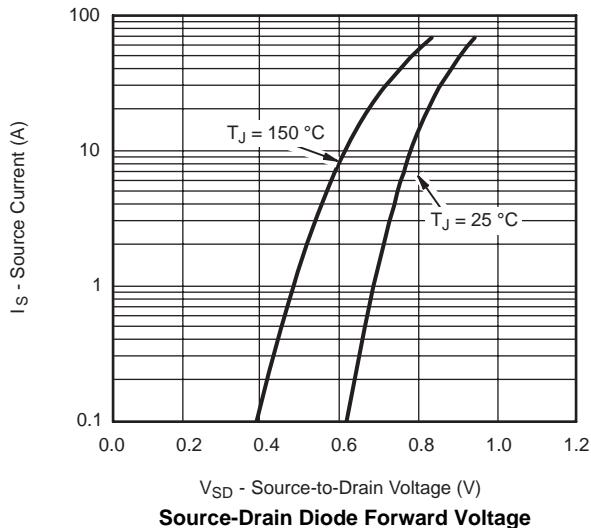
Absolute Maximum Ratings (T_J=25 °C Unless Otherwise Noted)

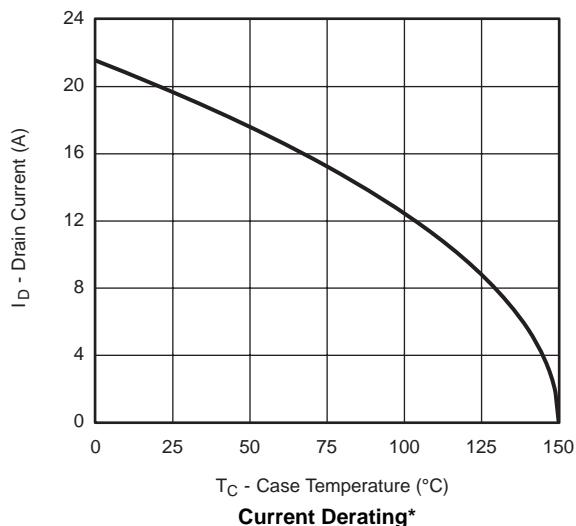
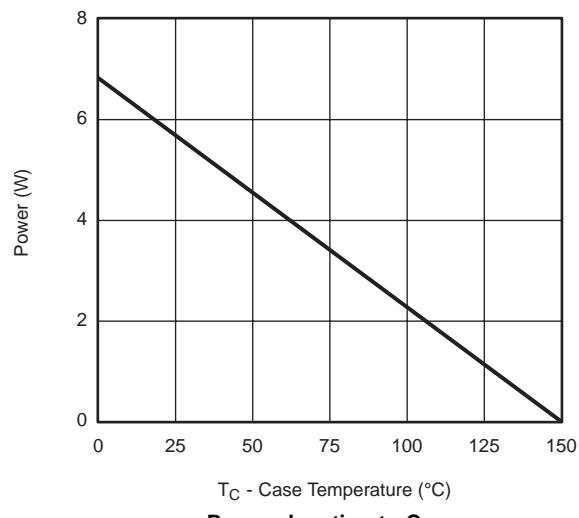
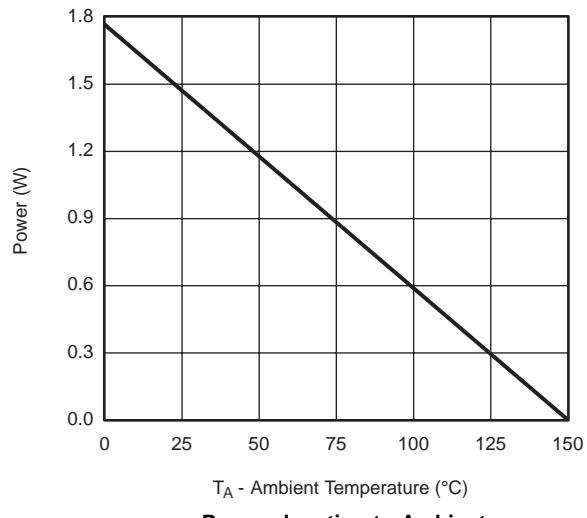
Symbol	Parameter	Value	Unit
P-MOSFET			
V _{DS}	Drain-Source Voltage	-30	V
V _{GS}	Gate-Source Voltage	± 20	V
I _D	Continuous Drain Current	-19.7	A
I _{DM}	Pulse Drain Current	-50	A
P _D	Maximum Power Dissipation	5.7	W
T _j	Junction Temperature	150	°C
T _{stg}	Storage Temperature	-55~+150	°C
T _L	Lead Temperature for Soldering Purposes(1/8" from case for 10 s)	260	°C
Thermal Resistance Ratings			
R _{thJA}	Maximum Junction-to-Ambient ^b	22	°C/W
	Maximum Junction-to-Ambient ^c	50	°C/W

Electrical Characteristics (T_J=25°C Unless Otherwise Specified)

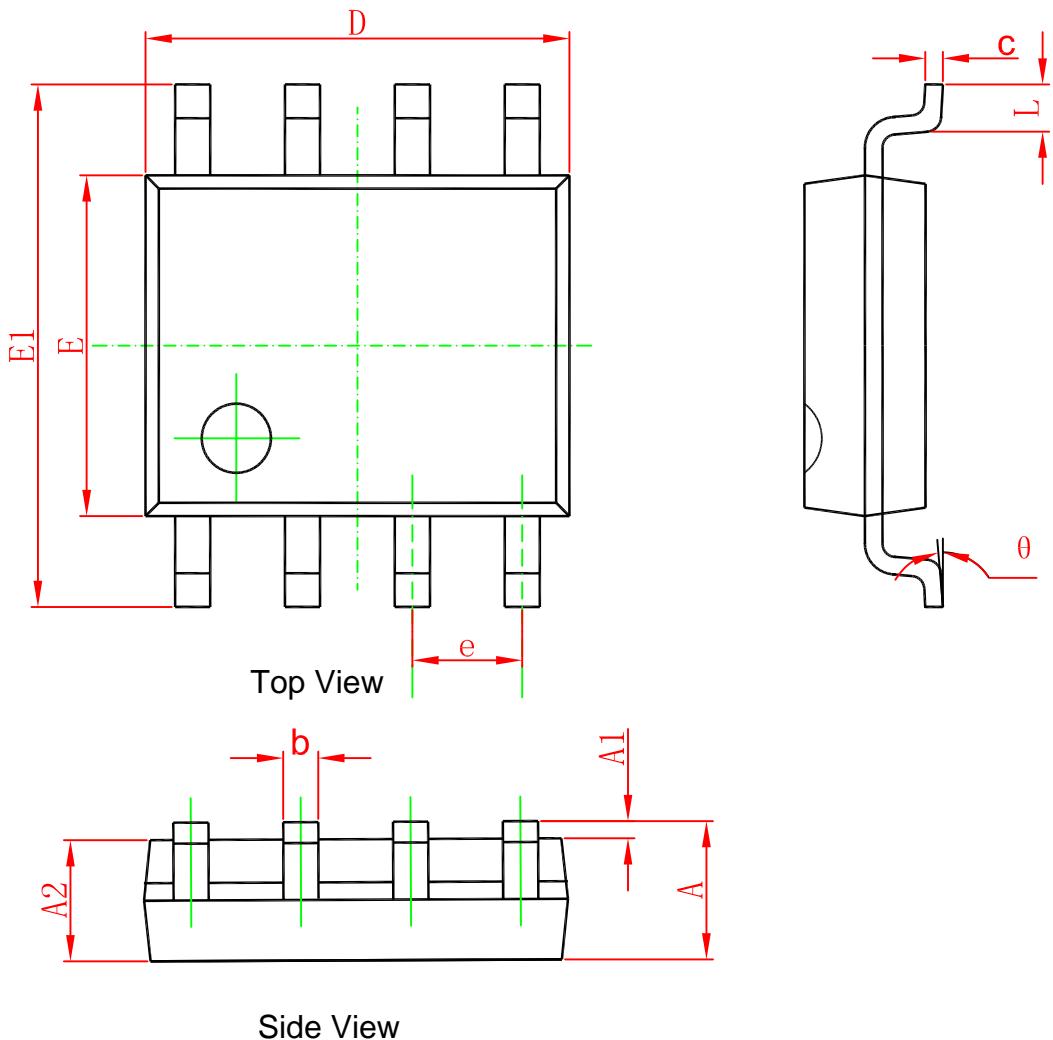
Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
STATIC PARAMETERS						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = - 250 μA	-30			V
Zero gate voltage drain current	I _{DSS}	V _{DS} = -30V, V _{GS} = 0V			-1	μA
Gate-body leakage current	I _{GSS}	V _{GS} = ±20V, V _{DS} = 0V			±100	nA
Gate threshold voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = - 250 μA	-1.2		-2.5	V
Drain-source on-resistance(note1)	R _{DS(on)}	V _{GS} = -10V, I _D = -13A		8.1	9.8	mΩ
		V _{GS} = -4.5V, I _D = -10A		13.7	16.5	mΩ
Forward transconductance(note1)	g _{FS}	V _{DS} = -15V, I _D = -13A		40		S
Diode forward voltage(note1)	V _{SD}	I _S = -10A, V _{GS} = 0V		-0.8	-1.2	V
DYNAMIC						
Input capacitance	C _{iss}	V _{DS} = -15V, V _{GS} = 0V, f = 1MHz		2610		pF
Output capacitance	C _{oss}			460		pF
Reverse transfer capacitance	C _{rss}			395		pF
SWITCHING PARAMETERS (note 2)						
Turn-on delay time	t _{d(on)}	V _{GS} = -4.5V, V _{DD} = -15V, R _L = 1.5Ω, R _G = 1Ω, I _D = -10A		52	78	ns
Turn-on rise time	t _r			41	62	ns
Turn-off delay time	t _{d(off)}			36	54	ns
Turn-off fall time	t _f			15	25	ns
Total Gate Charge	Q _g	V _{DS} = -15V, V _{GS} = -4.5V, I _D = -13A		27	41	nC
Gate-Source Charge	Q _{gs}			8		nC
Gate-Drain Charge	Q _{gd}			13		nC

MOSFET TYPICAL CHARACTERISTICS (25°C, unless otherwise noted)


MOSFET TYPICAL CHARACTERISTICS (25°C, unless otherwise noted)


MOSFET TYPICAL CHARACTERISTICS (25°C, unless otherwise noted)

Current Derating*

TC - Case Temperature (°C)
Power, Junction-to-Case

TA - Ambient Temperature (°C)
Power, Junction-to-Ambient

SOP-8L Package Information



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270 (BSC)		0.050 (BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°