


ECTNCCB24VB

Bidirectional TVS ARRAY

The ECTNCCB24VB is a bi-directional TVS diode, utilizing leading monolithic silicon technology to provide fast response time and low ESD clamping voltage, making this device an ideal solution for protecting voltage sensitive high-speed data lines. The ECTNCCB24VB has a low capacitance with a typical value at 1pF, and complies with the IEC 61000-4-2 (ESD) standard with $\pm 30\text{kV}$ air and $\pm 30\text{kV}$ contact discharge. It is assembled into a leadfree SOD-323 package. The small size, low capacitance and high ESD surge protection make ECTNCCB24VB an ideal choice to protect cell phone, wireless systems, and communication equipment. .

Features


- 350 Watts Peak Pulse Power per Line (8 x 20 us Waveform)
- Replacement for MLV (0805)
- Protects One Power or I/O Port
- Low Clamping Voltage
- Solid-state silicon avalanche technology
- ROHS compliant

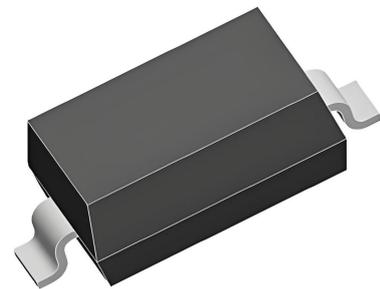

SOD-323

Main applications

- Hand-Held Portable Applications
- Networking and Telecom(Ethernet 10/100/1000 Base T)
- USB Interface
- Automotive Electronics
- Serial and Parallel Ports
- Notebooks, Desktops, Servers



Protection solution to meet

- IEC61000-4-2 (ESD) $\pm 30\text{kV}$ (air), $\pm 30\text{kV}$ (contact)
- IEC61000-4-4 (EFT) 40A (5/50ns)

Ordering Information

Device	Qty per Reel	Reel Size
ECTNCCB24VB	3000	7 Inch

Maximum ratings (Tamb=25°C Unless Otherwise Specified)			
Parameter	Symbol	Value	Unit
Peak Pulse Power (tp=8/20µs waveform)	PPPP	350	Watts
Peak Pulse Current (8/20µs)	IPP	7	A
ESD Rating per IEC61000-4-2:	Contact	30	KV
	Air	30	
Lead Soldering Temperature	TL	260 (10 sec.)	°C
Operating Temperature Range	TJ	-55 ~ 150	°C
Storage Temperature Range	TSTG	-55 ~ 150	°C
Lead Solder Temperature – Maximum (10 Second Duration)	TL	260	°C

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.


*Other voltages may be available upon request.

1. Non-repetitive current pulse, per Figure 1.


Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	VRWM			24	V	
Breakdown Voltage	VBR	26.7			V	IT = 1mA
Reverse Leakage Current	IR			1	uA	VRWM = 24V
Clamping Voltage	VC		43		V	IPP = 1A (8 x 20uS pulse)
Clamping Voltage	VC		52		V	IPP = 7A (8 x 20uS pulse)
Junction Capacitance	CJ		57		pF	VR = 0V, f = 1MHz

Junction capacitance is measured in VR=0V, F=1MHz


Symbol	Parameter
VRWM	Working Peak Reverse Voltage
VBR	Breakdown Voltage @ IT
VC	Clamping Voltage @ IPP
IT	Test Current
IRM	Leakage current at VRWM
IPP	Peak pulse current
CO	Off-state Capacitance
CJ	Junction Capacitance

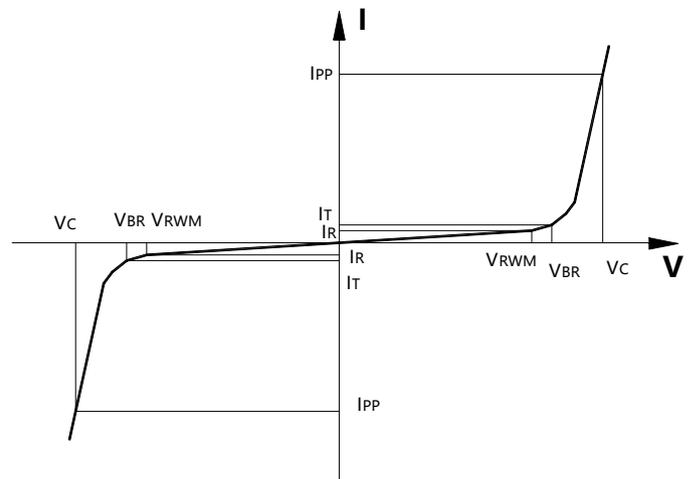


Typical electrical characterist applications

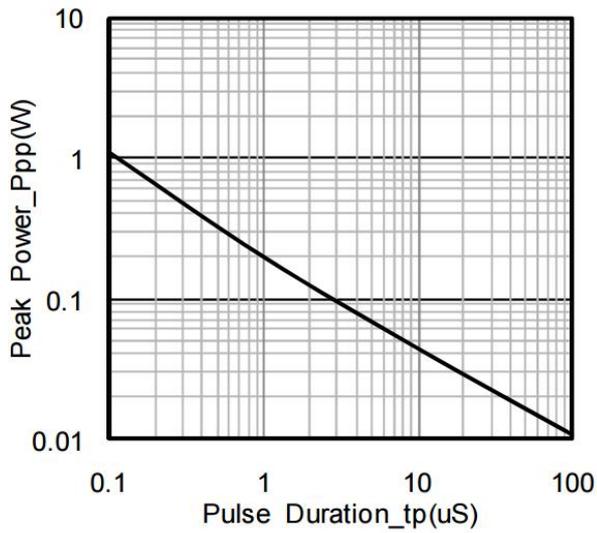

Peak Pulse Power vs. Pulse Time

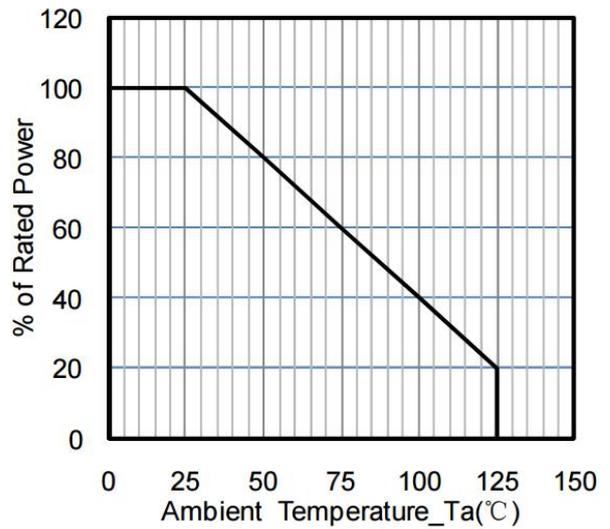

Power Derating Curve

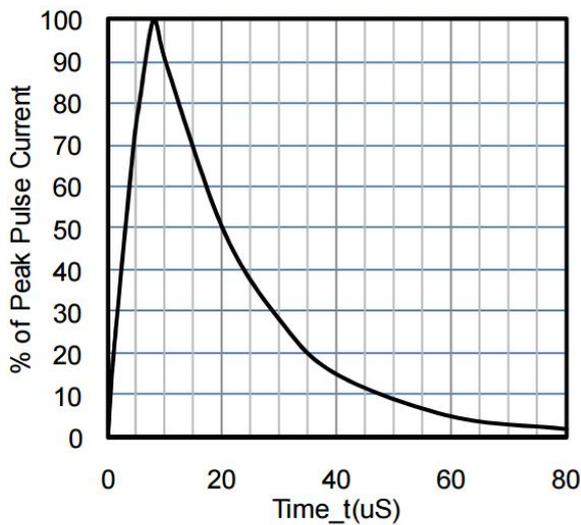

8 X 20uS Pulse Waveform



Package Information

SOD-323

Mechanical Data

Case: SOD-323

Case Material: Molded Plastic. UL Flammability

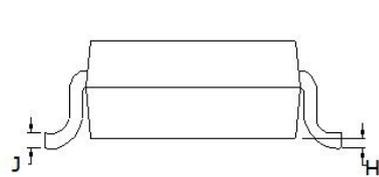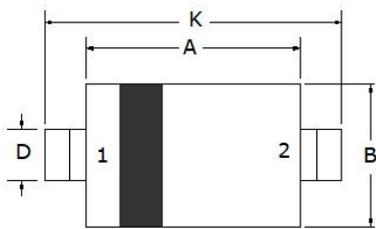

Dim	Millimeters	
	Min	Max
A	1.60	1.80
B	1.2	1.40
C	0.80	0.90
D	0.25	0.35
E	0.15REF	
H	0	0.10
J	0.08	0.15
K	2.50	2.70

Recommended Pad outline

